

Pulp Bale Clamps

Models BC-PF



The Bolzoni Auramo series BC-PF pulp bale clamps are designed for heavy-duty pulp bale and waste paper bale handling.

BC series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.

High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of one to three pulp-bale units.


Thin arm design makes tight bale stacking and knifing between bales easy. Pivoting left arm secures handling even with varying bale dimensions.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.

For dedicated handling of waste paper bales only we recommend our BC-PW series.



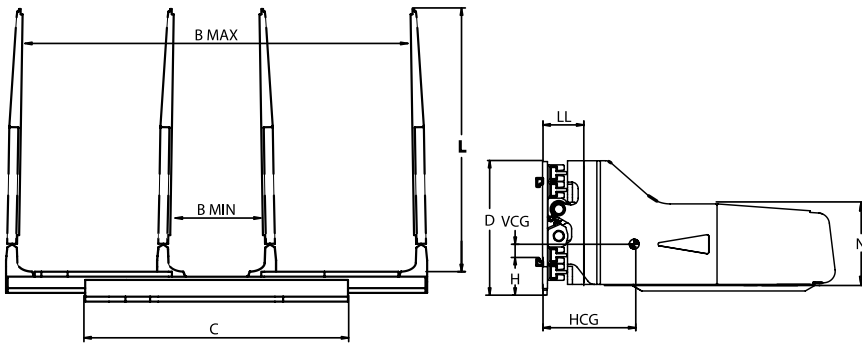

Range: 5000 Kg - 6500 Kg

- Bale clamp for handling pulp bales.
- Colourless arms welded directly to the arm carriers.
- Extremely thin and light design with optimal visibility.
- Steel profile frame, strong T-profile arm carriers.
- Left arm pivoted.
- Slim arm design.
- Built-in integral sideshift.

Model	Code	Capacity	Load Centre	Opening Range	Arm Length	Arm Height	Frame Width	Height	Weight	Centre of Gravity Horizontal	Centre of Gravity Vertical	Effective Thickness	Mounting Height	Mounting Class
		Q kg	BP mm	B mm	L mm	N mm	C mm	D mm	W Kg	HCG mm	VCG mm	LL mm	H mm	ISO 2328
BC-50PF	12TH1	5000	800	630-2360	1200	490	1600	874	1245	278	318	190	80	4 A
BC-50PF	14TH1	5000	800	630-2360	1400	490	1600	874	1310	322	313	190	80	4 A
BC-50PF	16TH1	5000	800	630-2360	1600	490	1600	874	1375	369	308	190	80	4 A
BC-50PF	12TJ1	5000	800	730-2560	1200	490	1600	874	1250	277	318	190	80	4 A
BC-50PF	14TJ1	5000	800	730-2560	1400	490	1600	874	1310	321	313	190	80	4 A
BC-50PF	16TJ1	5000	800	730-2560	1600	490	1600	874	1380	369	308	190	80	4 A
BC-50PF	12VH1	5000	800	630-2560	1200	490	1800	874	1320	272	321	190	80	4 A
BC-50PF	14VH1	5000	800	630-2560	1400	490	1800	874	1385	314	316	190	80	4 A
BC-50PF	16VH1	5000	800	630-2560	1600	490	1800	874	1450	360	311	190	80	4 A
BC-50PF	12VJ1	5000	800	730-2760	1200	490	1800	874	1320	272	321	190	80	4 A
BC-50PF	14VJ1	5000	800	730-2760	1400	490	1800	874	1385	314	316	190	80	4 A
BC-50PF	16VJ1	5000	800	730-2760	1600	490	1800	874	1455	359	311	190	80	4 A
BC-65PF	122H1	6500	800	630-2960	1200	490	2200	974	1650	255	366	210	80	4 A
BC-65PF	142H1	6500	800	630-2960	1400	490	2200	974	1715	291	360	210	80	4 A
BC-65PF	162H1	6500	800	630-2960	1600	490	2200	974	1790	330	354	210	80	4 A
BC-65PF	122J1	6500	800	730-3160	1200	490	2200	974	1650	254	366	210	80	4 A
BC-65PF	142J1	6500	800	730-3160	1400	490	2200	974	1720	291	360	210	80	4 A
BC-65PF	162J1	6500	800	730-3160	1600	490	2200	974	1790	330	354	210	80	4 A
BC-65PF	124H1	6500	800	630-3160	1200	490	2400	974	1730	251	368	210	80	4 A
BC-65PF	144H1	6500	800	630-3160	1400	490	2400	974	1800	286	362	210	80	4 A
BC-65PF	164H1	6500	800	630-3160	1600	490	2400	974	1870	324	356	210	80	4 A
BC-65PF	124J1	6500	800	730-3360	1200	490	2400	974	1735	251	368	210	80	4 A
BC-65PF	144J1	6500	800	730-3360	1400	490	2400	974	1800	286	362	210	80	4 A
BC-65PF	164J1	6500	800	730-3360	1600	490	2400	974	1875	323	357	210	80	4 A

Notes:

- Two hydraulic functions.

Options:

- Special opening ranges.

