

Waste Paper Bale Clamps

Models BC-PW



The Bolzoni Auramo series BC-PW waste paper bale clamps are designed for heavy-duty waste paper bale handling.

BC series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.


High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of all sizes of waste paper bale units.

Thin arm design makes tight bale stacking and knifing between bales easy. Fixed bale arms secure handling even with varying bale dimensions. Wear strips placed in the lower part of the frame and the arms.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.



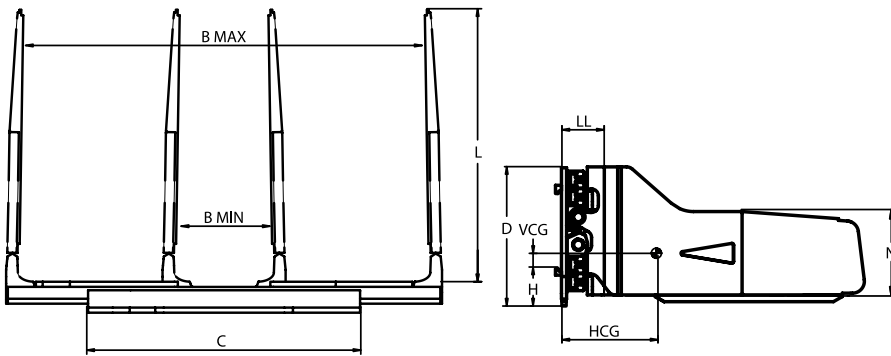

Range: 5000 Kg - 6500 Kg

- Bale clamp for handling waste paper bales.
- Colourless arms welded directly to the arm carriers.
- Extremely thin and light design with optimal visibility.
- Steel profile frame, strong T-profile arm carriers.
- Both arms fixed.
- Slim arm design.
- Wear strips placed in the lower part of the frame and the arms.
- Built-in integral sideshift.

Model	Code	Capacity	Load Centre	Opening Range	Arm Length	Arm Height	Frame Width	Height	Weight	Centre of Gravity Horizontal	Centre of Gravity Vertical	Effective Thickness	Mounting Height	Mounting Class
		Q kg	BP mm	B mm	L mm	N mm	C mm	D mm	W Kg	HCG mm	VCG mm	LL mm	H mm	ISO 2328
BC-50PW	12TH1	5000	800	630-2360	1200	490	1600	874	1320	258	322	190	95	4 A
BC-50PW	14TH1	5000	800	630-2360	1400	490	1600	874	1375	298	318	190	95	4 A
BC-50PW	16TH1	5000	800	630-2360	1600	490	1600	874	1440	342	313	190	95	4 A
BC-50PW	12TJ1	5000	800	730-2560	1200	490	1600	874	1320	258	322	190	95	4 A
BC-50PW	14TJ1	5000	800	730-2560	1400	490	1600	874	1375	298	318	190	95	4 A
BC-50PW	16TJ1	5000	800	730-2560	1600	490	1600	874	1440	342	313	190	95	4 A
BC-50PW	12VH1	5000	800	630-2560	1200	490	1800	874	1415	250	325	190	95	4 A
BC-50PW	14VH1	5000	800	630-2560	1400	490	1800	874	1470	288	321	190	95	4 A
BC-50PW	16VH1	5000	800	630-2560	1600	490	1800	874	1535	330	316	190	95	4 A
BC-50PW	12VJ1	5000	800	730-2760	1200	490	1800	874	1415	250	325	190	95	4 A
BC-50PW	14VJ1	5000	800	730-2760	1400	490	1800	874	1470	288	321	190	95	4 A
BC-50PW	16VJ1	5000	800	730-2760	1600	490	1800	874	1535	330	316	190	95	4 A
BC-65PW	122H1	6500	800	630-2960	1200	490	2200	974	1735	239	370	210	95	4 A
BC-65PW	142H1	6500	800	630-2960	1400	490	2200	974	1795	272	365	210	95	4 A
BC-65PW	162H1	6500	800	630-2960	1600	490	2200	974	1865	308	359	210	95	4 A
BC-65PW	122J1	6500	800	730-3160	1200	490	2200	974	1720	242	370	210	95	4 A
BC-65PW	142J1	6500	800	730-3160	1400	490	2200	974	1780	274	364	210	95	4 A
BC-65PW	162J1	6500	800	730-3160	1600	490	2200	974	1850	311	359	210	95	4 A
BC-65PW	124H1	6500	800	630-3160	1200	490	2400	974	1810	239	372	210	95	4 A
BC-65PW	144H1	6500	800	630-3160	1400	490	2400	974	1870	270	367	210	95	4 A
BC-65PW	164H1	6500	800	630-3160	1600	490	2400	974	1935	305	361	210	95	4 A
BC-65PW	124J1	6500	800	730-3360	1200	490	2400	974	1810	239	372	210	95	4 A
BC-65PW	144J1	6500	800	730-3360	1400	490	2400	974	1870	270	367	210	95	4 A
BC-65PW	164J1	6500	800	730-3360	1600	490	2400	974	1940	305	361	210	95	4 A

Notes:

- Two hydraulic functions.

Options:

- Special opening ranges.

